


Setup of Actisense W2K-1 on Sailmon MAX

Hardware setup

Connect the W2K-1 to NMEA2000 network and connect Black and Red to 12V DC power.
Connect Speed and/or Depth sensor to the same NMEA2000 network

Software setup

Connect to the unit using Wifi.
Use the Password on the unit to log in.
Go to your browser and connect to 192.168.4.1
Use admin as user and admin as password.
Go to Setting>Dataserver and set the settings as below and click update.
The unit will restart.

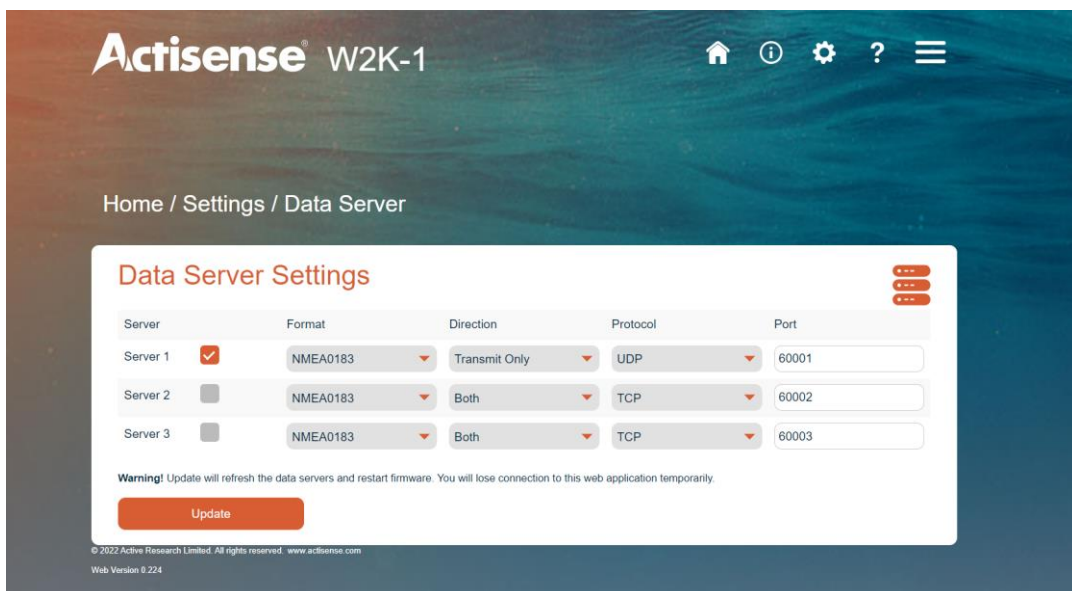

Setup of the MAX

Connect Wifi to the Actisense W2K-1 using the settings on the W2K-1
Go to Sensors>Set UDP input port.
Set to 60001 (Same as on the W2K-1)
On a page select external data you want to display